
Huon Highway and Mountain River Road Intersection

Option C – staggered intersection

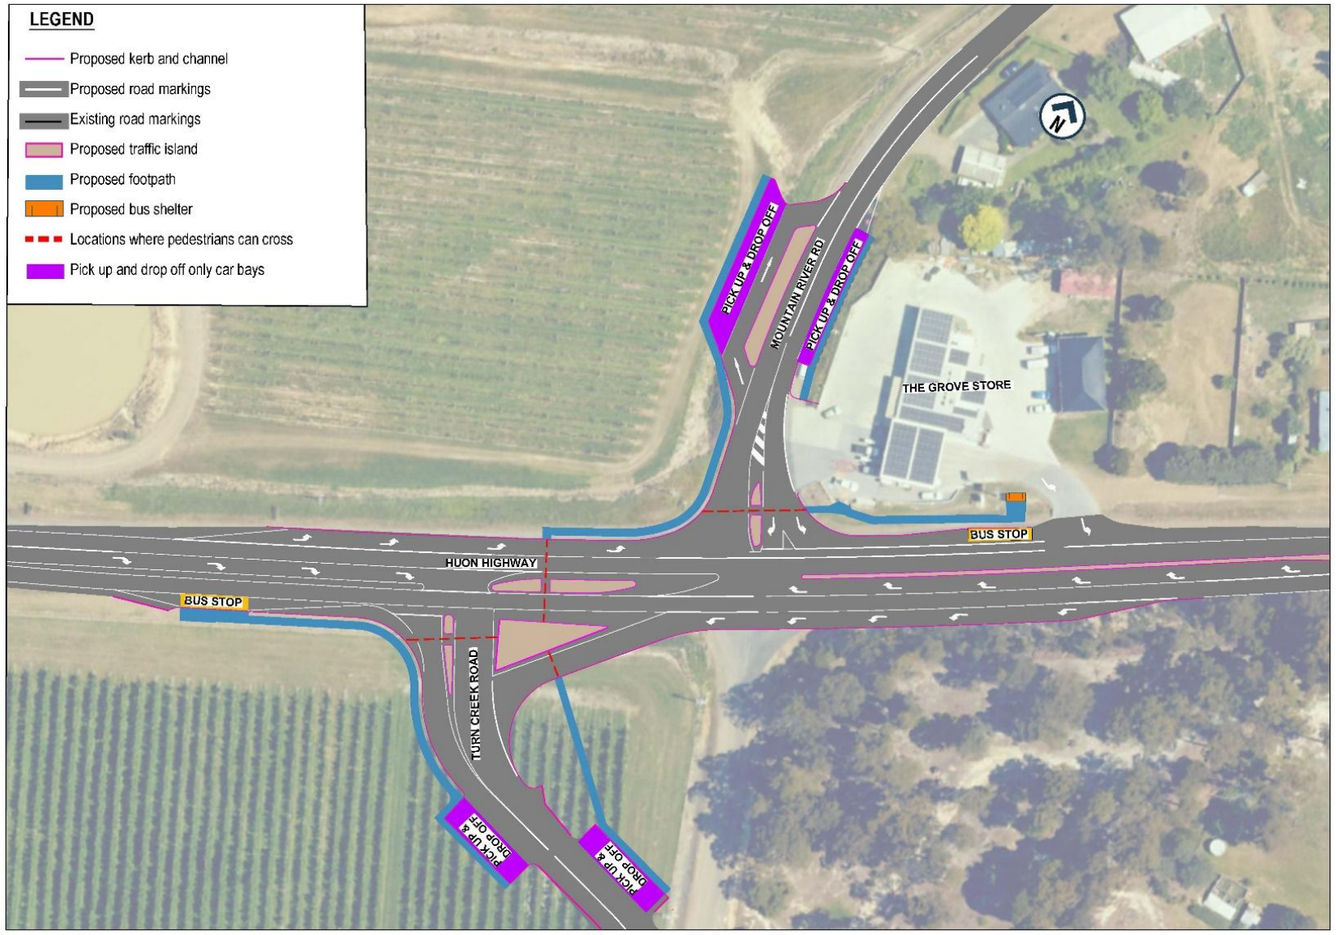

Design option only - subject to further design, consultation and approvals.

Summary

- Turn Creek Road realigned to create a staggered intersection.
- Includes areas pedestrians can stop (pedestrian refuges), when crossing the Huon Highway and Mountain River Road.
- Southbound bus stop relocated further along Huon Highway to allow for the new alignment on Turn Creek Road.
- Creates a car pick-up and drop-off area on Mountain River Road and Turn Creek Road.
- Grove store will be accessible via the Mountain River Road intersection.

Pros

- Bus operations are not affected.
- Provides car pick up and drop off areas on both Mountain River Road and Turn Creek Road.
- Improved safety for vehicles at the realigned intersection.
- Pedestrian refuges provided on Mountain River Road and Huon Highway allow pedestrians to cross one section at a time.
- Bus stops on Huon Highway upgraded to be more accessible.

Cons

- Pedestrians will need to cross Huon Highway to access the Grove Store from the southbound bus stop.
- High construction cost and duration.
- Significant land acquisition required with property impacts for landowners.

State Roads

Department of State Growth

Tasmanian Government